


DARRER®

The real Moisture content
within a few minutes!



Connection of up to
four UNITS per STATION
possible

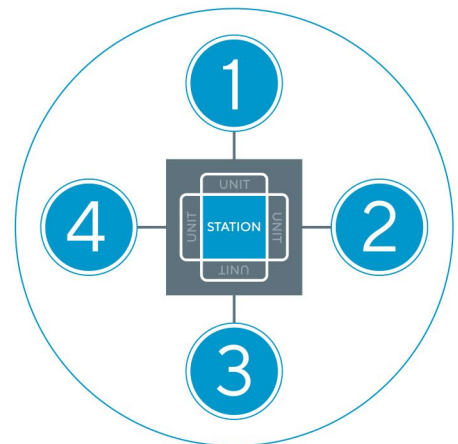

STATION

+

UNIT

1

=

DARRER®

QAVERTec

QAVERTec GmbH • Heideiland 20 • D-24976 Handewitt • Germany
Phone: +49 461 7071784-0 • E-Mail: info@qavertec.com • www.omnicon.com

A member of


Omnicon
GROUP

PRODUCT DATASHEET



STATION

TECHNICAL DATA			
Dimensions H x B x T	800 x 600 x 500 mm		
Voltage/Power consumption	230 V / 1 A		
Environmental temperature	Temperature 5 °C to 35 °C	Humidity 5 to 95 % (nicht kondensierend)	
Interface	1 x USB, 1 x RJ 45		
Processor Intel Atom X5-E 3940	Working memory 8 GB RAM, PC-equipment	Operating system WIN 10 64bit lot LTSC	Display 15 Zoll Touch IP65

UNIT

TECHNICAL DATA			
Dimensions close * H x W x D	444x 552 x 506 mm	Empty weight	20 kg
Rated voltage	230 V AC	Rated current	16 A
Thermal output	2.500 W	Environmental temperature	5 to 35 °C
Tolerance ±	1,5 g	Maximal product weighting	2,0 kg

* Please check the requirements for the installation location.

DELIVERY		
Scope of delivery	· 1 x STATION · 1 x UNIT · 1 Sample holder stainless steel · 10 Aluminum sample trays, reusable · Operating instructions · Declaration of Conformity · Circuit diagram · Technical datasheet · 2 Power cable; length: 5 m · 1 Data cable per UNIT (CAT7); length: 5 m	optional: · Protective grid · Aluminum sample trays

